

XSRS31-33

Function:

Rod seals are designed to seal the pressurized hydraulic fluid against the atmosphere or between two pressurized spaces.

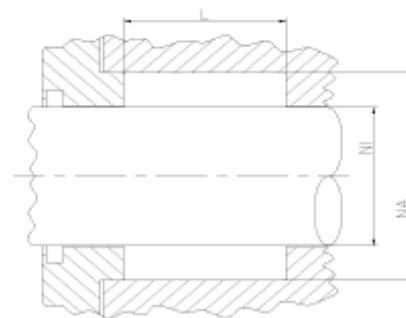
Features:

- Asymmetrical, single acting rod seal, combined with pressure ring and support ring.
- By adjusting the number of packings friction and leakage characteristics can be influenced.
- Excellent dynamic and good static sealing performance.
- Excellent performance in high pressure conditions.
- Especially used for long stroke lengths.
- Low friction due to flexible lip design.

Application:

Reciprocating rods in hydraulic cylinders, plungers, cylinders with very long strokes etc. as a replacement of fabric reinforced rubber seals. Used in heavy duty applications (presses) with return stroke by equipment weight.

Max. pressure 500 bar, max. speed 0.5 m/s.

**Seal housing recommendation:**

Tolerances	[mm]	
L < 10 mm	+0.2	
L ≥ 10 mm	+0.3	
Ø NA	H10	
Ø NI	f 8	

Surface roughness	Rtmax [μ]	Ra [μ]
Bottom of groove	≤ 6.3	≤ 1.6
Face of groove	≤ 15	≤ 3

Sliding surface	Rtmax [μ]	Ra [μ]
PU, elastomeres	≤ 2.5	≤ 0.1 - 0.5
PTFE	≤ 2	≤ 0.05 - 0.3

Installation:

Installation normally in open housings.

At closed housings the parts need to be split. In this case the seal must be done slightly larger (approx. 1% in diameter)