

# Rotary Seal XSVR06

## Function:

V-Rings are designed to axially seal bearings against dirt, dust, water, etc. in rotating machinery. The V-Ring itself rotates with the shaft.

## Features:



- Rotary seal, designed with interference on the ID which provides a good static fit on the shaft and ensures the seal rotates with the shaft.
- Axial dynamic sealing lip vertical to the rod.
- Small contact pressure of the sealing lip that enables also "dry running".
- Low friction on the sealing lip - decreasing with the rotation speed as a result of the centrifugal force.
- Little abrasion and long lifetime.
- Ensurance of sealing also at excentric rods or rod misalignments.
- Pressure must be avoided.

## Application:

Slow and fast rotating shafts.

Secondary sealing element for preventing the primary seal (f.e. OS01).

Max. pressure 0 bar, max. speed 25 m/s.

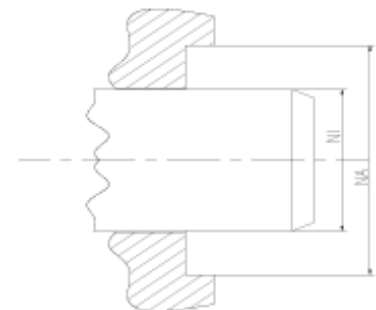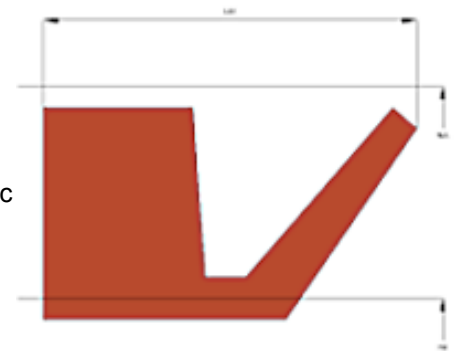

## Seal housing recommendation:

Tolerances	[mm]	
Ø NA	H 12	
Ø NI	h 11	
Sliding surface	Rtmax [ $\mu$ ]	Ra [ $\mu$ ]
	$\leq 12$	$\leq 2.5$

## Installation:

Pull-over installation.